

09/23/99
JCS55 U.S. PTO

THE COMMISSIONER OF PATENTS AND TRADEMARKS
Washington D.C. 20231
Box Patent Applications

Case Docket No. FUJY 16.538
Filed by Express Mail
(Receipt No. EM366877247US)
on September 23, 1999
pursuant to 37 CFR 1.10
by Donalor

JCS55 U.S. PTO
09/401934
09/23/99

S I R:

Transmitted herewith for filing is: ☒ a new application
[] a c-i-p application of S.N. _____ filed _____

Inventor(s): Miyuki KAWATAKA

For: CONGESTION INFORMATION SETTING SYSTEM

Enclosed are:

- ☒ 21 sheets of drawings. (Figs.1-25)
☒ Specification, including claims and abstract (48 pages)
☒ Declaration
☒ An assignment of the Invention to FUJITSU LIMITED
☒ A certified copy of Japanese Application No.10-282567
☒ An associate power of attorney
[] A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27
☒ Post card
☒ Recording fee (as indicated below)
☒ Information Disclosure Statement, PTO-1449, copies of 5 references
[] Other _____
[] Other _____

	Col. 1	Col. 2
FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	6-20 =	0
INDEP CLAIMS	1-3 =	0
[] MULTIPLE DEPENDENT CLAIMS PRESENTED		

*If the difference in Col. 1 is less than zero, enter "0" in Col. 2

SMALL ENTITY	
RATE	FEE
	\$380
x 9 =	\$
x 39 =	\$
x 130 =	\$
TOTAL	\$

OTHER THAN A SMALL ENTITY	
RATE	FEE
	\$760
x 18 =	\$
x 78 =	\$
x 260 =	\$
TOTAL	\$760


[] Please charge our Deposit Account No. 08-1634 the amount of _____ to cover the filing fee and recording fee (if any)

☒ A check in the amount of \$800.00 to cover the filing fee and the recording fee (if any) is enclosed.

☒ The Commissioner is hereby authorized to charge payment of any fee associated with this communication or credit overpayment to Deposit Account No. 08-1634. A duplicate copy of this sheet is enclosed.

Helfgott & Karas, P.C.
60th Floor
Empire State Building
New York, New York 10118-6098
(212)643-5000

Respectfully Submitted,

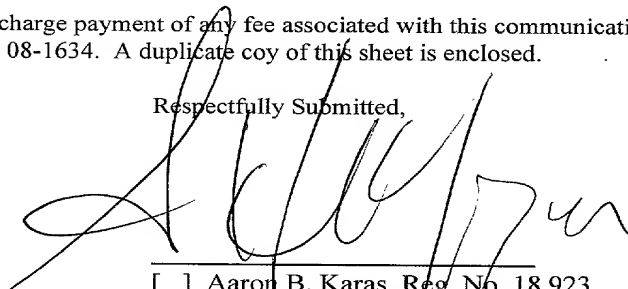

Date: September 23, 1999

Any fee due with this paper, not fully covered by an enclosed check, may be charged on Deposit Acct No. 08-1634

- [] Aaron B. Karas, Reg. No. 18,923
☒ Samson Helfgott, Reg. No. 23,072
[] Leonard Cooper, Reg. No. 27,625
[] Linda S. Chan, Reg. No. 42,400
[] Jacqueline M. Steady, Reg. No. 44,354

CONGESTION INFORMATION SETTING SYSTEM

BACKGROUND OF THE INVENTION

1. FIELD OF THE INVENTION

The present invention generally relates to a congestion information setting system used in a local area network (LAN). More specifically, the present invention is directed to such a technique capable of transferring congestion information in a transmission service for connecting a frame relay network to an ATM network.

2. DESCRIPTION OF THE RELATED ART

A transmission service capable of realizing an interworking function by connecting an FRS (Frame Relay Service) network to an ATM (Asynchronous Transfer Mode) network is known in the technical field.

Fig. 2 schematically indicates a structure of a system

capable of realizing this interworking function service. In this figure, reference numeral 201 shows an ATM network, reference numeral 202 indicates an FRS/ATM converting function unit, reference numeral 203 denotes a node, and reference numeral 204 represents a frame relay terminal connected to this node 203. In this system, both the node 203 and the frame relay terminal 204 constitute a frame relay network 205.

In such a system arrangement, a frame relay format is converted into an ATM cell format, and also an ATM cell format is converted into a frame relay format in the FRS/ATM converting function unit 202. That is to say, a format conversion in a direction from a frame relay format to an ATM cell format is indicated in Fig. 3. Referring now to Fig. 3, a description will be made of a format converting sequence in the direction from the frame relay format to the ATM cell format.

First, in an FR-SSCS (Frame Relaying - Service Specific Convergence Sublayer) layer, both an address field of Q. 922-DLL-PDU (Dynamic Link Library - Protocol Data Unit) and an information field thereof, from which "0" bit has been deleted, are derived so as to be converted into an FR-SSCS-PDU (Frame Relaying - Service Specific Convergence Sublayer - Protocol Data Unit).

In a CPAAL5 (Common Part ATM Adaptation Layer 5), the converted FR-SSCS-PDU is acquired as a CPAAL5-SDU (Service Data Unit). A CPAAL5-PDU (Protocol Data Unit) trailer portion is added to this acquired CPAAL5-SDU, and then the resulting PDU is converted into a CPAAL5-PDU.

Furthermore, this CPAAL5-PDU is divided every 48 octets into SAR-PDU.

In an ATM layer, an ATM header containing a PTI and the like is added to this divided SAR-PDU (Segment And Reassembly-

Protocol Data Unit), and then the resulting PDU is converted into an ATM cell which is transmitted to an ATM-UNI (Asynchronous Transfer Mode - User - Network Interface).

On the other hand, a format converting sequence along a direction from an ATM cell format to a frame relay format is carried out opposite to the above-explained format converting sequence.

In the transmission service for providing such an interworking function, a congestion control was carried out as follows:

First, in the case of a forward direction from a frame relay format to an ATM cell format, an FECN (Forward Explicit Congestion Notification) indicative of congestion information of Q. 922-DLL is not mapped to an EFCI (Explicit Forward Congestion Indication) representative of congestion information, which is stored into a PTI (Payload Type

Identifier) field of an ATM cell belonging to this frame. In other words, the EFCI of the ATM cell would be always set to "no congestion".

Next, in the case of a forward direction from an ATM cell format to a frame relay format, only a portion of congestion information in an ATM network could be utilized for a frame relay. In other words, only when an EFCI field is set as "congestion occurs" in a last received ATM cell, this congestion information may be reflected to the frame relay.

On the other hand, in the case of a backward direction from an ATM cell format to a frame relay format, a BCI (Backward Congestion Indication) is provided only at a frame level having a BECN (Backward Explicit Congestion Notification). In this case, a BECN field of an FR-SSCS-PDU is duplicated without any change to a BECN field of a Q. 922 core frame.

Also, in the case of a backward direction from a frame

relay format to an ATM cell, when a BECN of a Q. 922-DLL frame transmitted along the direction from the frame relay format to the ATM cell is set as "congestion occurs", or when an EFCI of an ATM cell contained in a segment frame last received along the direction from the ATM cell format to the frame relay format is set as "congestion occurs", a BECN field of an FR-SSCS-PDU is set as "congestion occurs".

However, in this backward direction, the congestion information contained in the Q. 922 core frame and the congestion information contained in the FR-SSCS are not always identical to each other as to the protocol field and the function in the ATM network. As a consequence, in such a case that different types of networks are connected to each other, distortion may occur in the congestion information. As a result, although such congestion information may not be required for a certain service form, there are possibilities

that extra workloads are given to an information control unit of a network so as to process this congestion information.

The present invention has been made to solve the above-explained problems, and therefore, has an object to provide a congestion information setting system capable of transmitting congestion information even in an interworking function effected between a frame relay network and an ATM network.

SUMMARY OF THE INVENTION

To achieve the above-described object, a first means of the present invention is featured by that in a connection apparatus for interfacing a frame relay network and an ATM network, the first means is provided with: congestion information extracting means for extracting congestion information from data of one network of the frame relay network and the ATM network; mode setting means for

combining the extracted congestion information with congestion information of an output side in accordance with a setting condition; and congestion information writing means for writing the combined congestion information into data of the other network of the frame relay network and the ATM network in response to a mode set by the mode setting means.

Since the mode setting means is employed, the congestion information can be transmitted between different networks in a flexible manner. That is, this first means enables to be flexibly applied to a case that congestion information of one network is directly transmitted to the other network, another case that the congestion information of one network is directly transmitted to the other network only under predetermined condition, and another case that the congestion information of one network is completely untransmitted to the other network.

A second means of the present invention is featured by that in the above-described first means, while setting the congestion information along a forward direction defined from the frame relay network to the ATM network, when the mode setting means receives frame relay data indicating that the congestion information corresponds to "congestion occurs", the mode setting means selects any one of: a first mode in which "congestion occurs" is set to at least congestion information of an ATM cell corresponding to a segment frame; a second mode in which "congestion occurs" is set to congestion information of all of ATM cells corresponding to a segment frame; and a third mode in which "congestion occurs" is set only to congestion information of a final ATM cell corresponding to a segment frame. As a result, the congestion information can be transmitted along the forward direction defined from the frame relay network to the ATM network.

A third means of the present invention is featured by that in the above-explained first means, while setting the congestion information along a forward direction defined from the ATM network to the frame relay network, when the mode setting means receives an ATM cell indicating that the congestion information corresponds to "congestion occurs", the mode setting means selects any one of: a first mode in which "congestion occurs" is set to at least congestion information of frame relay data when said received ATM cell is a final ATM cell corresponding to a segment frame; and a second mode in which "congestion occurs" is set to congestion information of frame relay data when the received ATM cell is any one of ATM cells corresponding to a segment frame.

As a consequence, since only the congestion information of the final ATM cell is employed (first mode), the congestion information of the other ATM cells can be neglected, so that

the congestion information can be effectively processed.

Furthermore, while another system (second mode) for transmitting the congestion information by any of the ATM cells is provided, an ATM cell having high reliability of information to be transmitted can be processed with a priority.

A fourth means of the present invention is featured by that in the above-described first means, while setting the congestion information along a backward direction defined from the ATM network to the frame relay network, the mode setting means selects any one of: a first mode in which the congestion information transmitted from the backward direction is directly set to congestion information of frame relay data; and a second mode in which congestion information of frame relay data is always set to "no congestion". As previously explained, since the second mode is provided, in such a case

that distortion occurs when the different types of networks are connected to each other, the congestion information is discarded, so that the processing operation can be carried out irrespective of the congestion information.

A fifth means of the present invention is featured by that in the above-explained first means, while setting the congestion information along a backward direction defined from the frame relay network to the ATM network, the mode setting means is comprised of congestion transition means for transferring a congestion state in response to a congestion information value of an ATM cell received along the backward direction, and the mode setting means selects any one of plural modes prepared by combining the state of the congestion transition means with congestion information of frame relay data.

As a consequence, it is possible to set to the congestion

information of the frame relay having no compatibility with respect to the received congestion information.

A sixth means of the present invention is featured by that in the above-explained fifth means, the congestion transition means is comprised of a timer, and forcibly updates a congestion state when new congestion information is not reached for a predetermined time period.

As a result, the congestion information is updated every time a preselected time period has passed, and therefore, it is possible to avoid that the mode is set while maintaining the old congestion information.

BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the present invention, reference is made of a detailed description to be read in conjunction with the accompanying drawings, in which:

Fig. 1 is a schematic block diagram for showing an arrangement of an FRS/ATM converting function unit according to an embodiment of the present invention;

Fig. 2 is a schematic block diagram for representing a system structure capable of realizing an interworking service according to this embodiment of the present invention;

Fig. 3 illustratively shows a format diagram of the respective layers from a frame relay format to an ATM cell format;

Fig. 4 is a flow chart for describing a VCC state transition in this embodiment;

Fig. 5 shows a format diagram of a Q. 922-DLL-PDU;

Fig. 6 represents a format diagram of an FR-SSCS-PDU;

Fig. 7 indicates a format diagram of a CPAAL5-PDU;

Fig. 8 is an explanatory diagram for explaining contents of the respective fields of the CPAAL5-PDU;

Fig. 9 is a format diagram of an ATM cell;

Fig. 10 is an explanatory diagram for explaining a forward direction defined from a frame relay network to an ATM network;

Fig. 11 is an explanatory diagram for explaining a backward direction defined from a frame relay network to an ATM network;

Fig. 12 is an explanatory diagram for explaining a forward direction defined from an ATM network to a frame relay network;

Fig. 13 is an explanatory diagram for explaining a backward direction defined from an ATM network to a frame relay network;

Fig. 14 is a flow chart for describing a mode setting method for a forward direction defined from a frame relay network to an ATM network;

Fig. 15 is a flow chart for describing a mode setting method for a forward direction defined from an ATM network to a frame relay network;

Fig. 16 is a flow chart for describing a mode setting method for a backward direction defined from an ATM network to a frame relay network;

Fig. 17 is a flow chart for describing a mode setting method for a backward direction defined from a frame relay network to an ATM network;

Fig. 18 is an explanatory diagram for explaining types of mode setting of a forward direction defined from a frame relay network to an ATM network;

Fig. 19 is an explanatory diagram for explaining a set value obtained on the basis of a mode setting result of a forward direction defined from a frame relay network to an ATM network;

Fig. 20 is an explanatory diagram for explaining a type of mode setting of a forward direction defined from an ATM network to a frame relay network;

Fig. 21 is an explanatory diagram for explaining a set value obtained on the basis of a mode setting result of a forward direction defined from an ATM network to a frame relay network;

Fig. 22 is an explanatory diagram for explaining types of mode setting for a backward direction defined from an ATM network to a frame relay network;

Fig. 23 is an explanatory diagram for explaining a set value obtained on the basis of a mode setting result of a backward direction defined from an ATM network to a frame relay network;

Fig. 24 is an explanatory diagram for explaining types of mode setting for a backward direction defined from a frame

relay network to an ATM network; and

Fig. 25 is an explanatory diagram for explaining a set value obtained on the basis of a mode setting result of a backward direction defined from a frame relay network to an ATM network.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to drawings, various preferred embodiments of the present invention will be described.

INTERNAL ARRANGEMENT OF FRS/ATM CONVERTING FUNCTION UNIT

Fig. 1 shows a structural block diagram of an FRS/ATM converting function unit according to an embodiment of the present invention.

In an upper-half drawing portion of this FRS/ATM converting function unit, a data conversion along a direction defined from an ATM cell format to a frame relay format is carried

out. In this figure, reference numeral 401 indicates an ATM cell receiving unit, namely corresponding to an interface for receiving an ATM cell sent from an ATM network. Reference numeral 402 shows a data expanding unit. In this data expanding unit 402, data of an ATM cell is expanded, and then, this expanded data is used to constitute frame relay data. Reference numeral 403 represents an EFCI saving unit for extracting an EFCI (Explicit Forward Congestion Indication) from ATM data to save this extracted EFCI. The value of this EFCI is compared with a value of an FECN (Forward Explicit Congestion Notification) produced from the expanded data derived from the data expanding unit 402 by an FECN producing unit (in the case of forward direction) by a comparing unit 406. Then the comparison result is converted into a congestion bit by a congestion bit converting unit 407. The congestion bit is supplied via the congestion bit converting

unit 407 to an HDLC producing unit 412. . It should be noted that the comparing unit 406 contains a mode setting unit 410. An FECN of a Q. 922-DLL frame is set to either "congestion occurs" or "no congestion" in accordance with a setting mode of this mode setting unit 410.

The function of this mode setting unit 410 will be later discussed more in detail.

An abort producing unit 408 owns a function capable of producing an abort signal in the case that such a recognition is made of "congestion occurs" based on an EFCI extracted from an ATM cell. In response to this abort signal, a transmission frame is deleted in the HDLC producing unit 412.

Also, a BECN producing unit 405 owns a function capable of producing a BECN (Backward Explicit Congestion Notification) along a backward direction. A selector (SEL) has a function capable of selectively sending expanded data derived from the

data expanding unit 402 and a conversion result of the congestion bit converting unit 407 to the HDLC producing unit 412.

A buffer amount monitoring unit 414 monitors a buffer state of the data expanding unit 402 to notify the monitored buffer state to a read control unit 413. In response to the notification issued from this buffer amount monitoring unit 414 and a read reinitiating unit 415, the read control unit 413 controls the data reading operation from the data expanding unit 402.

On the other hand, in a lower-half drawing portion of this FRS/ATM converting function unit, a data conversion along a direction defined from a frame relay format to an ATM cell format is carried out.

A HDLC receiving unit 417 receives an HDLC of frame relay data, and transfers this received HDLC to a data saving unit

418. The data saving unit 418 extracts congestion information from this frame relay data, and then sends the extracted congestion information to both a BECN producing unit 420 and the FECN producing unit 421. The BECN produced from the BECN producing unit 420 is supplied to a mode setting unit 426. In accordance with a mode set by this mode setting unit 426, an EFCI is produced from an EFCI information producing unit 425, and this EFCI is inserted into an ATM cell.

Also, a selector (SEL) 422 selectively supplies the outputs derived from the data saving unit 418 and the BECN producing unit 420 to an SAR-PDU producing unit 423. Then, finally, such an ATM cell to which the congestion information has been set in the above manner is transmitted from an ATM cell transmitting unit 424 to an ATM network.

Next, frame structures of the respective layers (see Fig.

3) from a frame relay up to an ATM cell employed in this

embodiment will now be explained in detail.

STRUCTURE OF Q. 922-DLL-PDU

As indicated in Fig. 5, with respect to a Q. 922-DLL-PDU format, "0" bit is stuffed in fields other than a FLAG field (Bit Stuffing). Accordingly, after a FLAG is detected, "0" located immediately after "1" continued by 5 octets is extracted to format it as a frame relay. Similar to a header format of an FR-SSCS-PDU format (which will be discussed later), there are 3 types (namely, 2 octets, 3 octets, and 4 octets) of address fields.

The format structure of Q. 922-DLL-PDU shown in Fig. 5 is such a format structure from which "0" bit has been deleted. Also, the address field shown in this drawing is 2 octets.

In this drawing, the congestion information along the forward direction is stored into the FECN (Forward Explicit Congestion Indication), and the congestion information along

the backward direction is stored into the BECN (Backward Explicit Congestion Notification).

STRUCTURE OF FR-SSCS-PDU

As illustrated in Fig. 6, an FR-SSCS-PDU format is identical to the Q. 922-DLL-PDU format except for the flag, the "0"-bit stuffing portion, and the FCS.

STRUCTURE OF CPAAL5-PDU

Fig. 7 represents a CPAAL5-PDU format. In the CPAAL5, a variable length frame (namely, 1 to 65535-octet lengths) transmission is performed. As a consequence, in the CPAAL5-PDU format, there are provided a pad (PAD: Packet Assembly/Disassembly) used to multiply an ATM cell by an integer, extracting of a frame portion, and a length field for detecting an error which is not detected by CRC-32.

Fig. 8 represents contents of the respective fields contained in the CPAAL5-PDU.

STRUCTURE OF ATM CELL

Fig. 9 represents a format of an ATM cell. In this drawing, congestion information which is transmitted as EFCI information is stored into a PTI (Payload Type Identifier).

This PTI is arranged by 3 octets. It should be noted that either "000" or "001" implies "no congestion", and either "010" or "011" implies "congestion occurs".

CONGESTION INFORMATION TRANSMISSION ALONG

FORWARD/BACKWARD DIRECTIONS

Referring now to Fig. 10 to Fig. 13, congestion information along a forward direction and also a backward direction will be described.

In this specification, the following definition is made: with respect to a transmission direction of congestion information, an indication of a congestion condition occurred in an up stream is defined as a "forward direction", whereas

an indication of a congestion condition occurred in a down stream is defined as a "backward" direction.

In this case, it is practically difficult to specify an actually existing congestion point with employment of the FECI information, the FECN information, and the BECN information. However, it is possible to clarify a direction along which congestion is present.

Fig. 10 represents a format direction defined from a frame relay network to an ATM network. As far as to whether or not congestion is present in the upper stream, namely on the side of a frame relay network 205 is transmitted as an FECN of a Q. 922 core frame. This FECN information of the Q. 922 core frame is converted into an FECN of an FR-SSCS (see Fig. 6) by an FRS/ATM converting function unit (IWF) 202. Then, the converted FECN information of the FR-SSCS is stored into the EFCI which is stored into the PTI of the ATM cell (see Fig.

9), depending upon each of various modes. As a result, it is possible to recognize as to whether or not the congestion is present on the upper stream side (namely on the frame relay network side) in the ATM network 201.

Fig. 11 indicates a backward direction defined from the frame relay network to the ATM network. A Q. 922 BECN indicative of congestion occurred from the upper stream side (frame relay network side) along the backward direction is acquired, and furthermore, an EFCI of an ATM cell arrived from the down stream direction (ATM network side) is read. As a result, these Q. 922 BECN and EFCI of the ATM cell are reflected to BECN of FR-SSCS in accordance with the respective modes, and the congestion information on the down stream side (ATM network side) can be transmitted.

Fig. 12 represents a forward direction defined from the ATM network to a frame relay network. A fact as to whether or not

congestion is present in the upper stream, namely on the side of the ATM network 201 is transmitted as an EFCI stored in a PTI of an ATM cell. This EFCI information is converted into an FECN of an FR-SSCS (see Fig. 6) by the FRS/ATM converting function unit (IWF) 202 in combination with the congestion information of the original FECN of the FR-SSCS in accordance with the respective modes. Furthermore, this converted FECN information is transmitted as an FECN of a Q. 922 core frame to the frame relay network 205 side. As a result, it is possible to recognize as to whether or not the congestion is present on the upper stream side (namely on the ATM network side) in the frame relay network 205.

Fig. 13 indicates a backward direction defined from the ATM network to the frame relay network. A BECN of an FR-SSCS arrived from the down stream direction (i.e., frame relay network side) is read into the FRS/ATM converting function

unit (IWF) 202, and then this BECN information is converted into a BECN of the Q. 922 core frame in accordance with the respective modes. As a result, the congestion information occurred on the down stream side (frame relay network side) can be transmitted.

In this embodiment, the mode setting units 410 and 426 as explained with reference to Fig. 1 may prepare several modes. In accordance with these modes, a decision is made how congestion information occurred in one network is transferred to another network, depending upon a combination of a group of the above-described frame relay network to ATM network and the above-explained ATM network to frame relay network, and another group of the above-described forward direction and backward direction.

Fig. 14 to Fig. 17 illustratively show types of mode setting operations along the forward/backward directions.

MODE SETTING OPERATION OF FORWARD DIRECTION:

FRAME RELAY NETWORK to ATM NETWORK

Fig. 14 is a flow chart for showing a control sequence in the forward direction defined from the frame relay network to the ATM network.

In this flow chart, when the FRS/ATM converting function unit (IWF) 202 receives the Q. 922 core frame, if the value of FECN information is equal to "0" (step 1401), namely no congestion occurs on the side of the upper stream (i.e., frame relay network side), then "0" is set to the FECN value of FR-SSCS, and furthermore, "0" is set to the EFCI value of the ATM cell (step 1402).

On the other hand, in such a case that the FECN value of the Q. 922 core frame is not equal to "0" at the above-described step 1401, three modes are selectable.

That is, a first mode (step 1404) corresponds to such a

mode similar to the conventional mode. In this first mode, the FECN field of the Q. 922 core frame is directly duplicated to the FECN field of FR-SSCS without any conditions. However, this value is not reflected to the ATM cell. As a consequence, in this first mode, the FECN value of FR-SSCS is set to "1", and the EFCI value of the ATM cell is set to "0".

A second mode (step 1405) corresponds to a mode specific to this preferred embodiment. In this specific second mode, the FECN information of the Q. 922 core frame is mapped to all of the EFCI information of the ATM cells belonging to this core frame (namely, converted from this frame). By using this second mode, the congestion information of the Q. 922 core frame will be directly reflected to all of the ATM cells.

A third mode (step 1406) also corresponds to a mode specific to this preferred embodiment. In this specific third mode, the FECN information of the Q. 922 core frame is mapped

only to the EFCI information of the last ATM cell belonging to this core frame (namely, converted from this frame). By using this third mode, the congestion information is merely processed only in the last ATM cell. As a consequence, it is possible to avoid such a problem that the transfer process operation is delayed by executing the cumbersome congestion information processing operation.

Fig. 18 indicates the contents of these first to third modes, and Fig. 19 represents the setting conditions of the FECN of FR-SSCS and the EFCI of the ATM cells in the respective modes.

MODE SETTING OPERATION OF FORWARD DIRECTION: ATM NETWORK
to FRAME RELAY NETWORK

Fig. 15 is a flow chart for showing a control sequence in the forward direction defined from the ATM network to the frame relay network.

In this flow chart, when "0" is set to a value of EFCI of an ATM cell received by the FRS/ATM converting function unit (IWF) 202 (step 1501), a determination is made as to whether or not a value of FECN of FR-SSCS is also equal to "0" (step 1502). When both values are equal to "0", "0" is set to a value of FECN of a Q. 922 core frame (step 1503).

On the other hand, when only a value of FECN of FR-SSCS is equal to "1", "1" is set to a value of FECN of the Q. 922 core frame (step 1507).

Also, when the value of EFCI of the ATM cell is equal to a value other than "0", two modes are selectable (step 1504).

In a first mode (step 1505), a determination is made as to whether or not a value of EFCI of the last ATM cell corresponding to the Q. 922 core frame is equal to "1" (step 1505). When this value is equal to "1", "1" is similarly set to a value of FECN of the Q. 922 core frame (step 1507). In

such a case that a value of EFCI of the last ATM cell is not equal to "1", "0" is set to a value of FECN of the Q. 922 core frame (step 1503).

A second mode (step 1506) corresponds to a mode specific to this preferred embodiment. In the case that an EFCI field of any ATM cell belonging to a segment frame to be received is set to "1", "1" is set to the value of FECN of the Q. 922 core frame. Also, when the values of EFCI of any ATM cells are equal to "0", "0" is set to the value of FECN of the Q. 922 core frame (step 1503). In accordance with this second mode, such information for indicating that the congestion occurs in any ATM cell will be reflected to the frame relay network side.

Fig. 20 indicates the contents of the mode operations.

Fig. 21 shows the set values of FECN of the Q. 922 core frame in the respective modes.

MODE SETTING OPERATION OF BACKWARD DIRECTION: ATM

NETWORK to FRAME RELAY NETWORK

Fig. 16 is a flow chart for showing a control sequence in the backward direction defined from the ATM network to the frame relay network.

In this flow chart of Fig. 16, a determination is made as to whether or not a value of BECN of FR-SSCS received by the FRS/ATM converting function unit (IWF) 202 is equal to "0" (step 1601). When this value of BECN of FR-SSCS is equal to "0", "0" is similarly set to the value of BECN of the Q. 922 core frame (step 1602).

To the contrary, when the value of BECN of FR-SSCS is not equal to "0", two modes are selectable (step 1603).

A first mode (step 1604) corresponds to such a mode that a value of a BECN field of FR-SSCS is directly duplicated to the Q. 922 core frame without any conditions.

A second mode (step 1602) corresponds to such a mode that the value of BECN of the Q. 922 core frame is always set to "0". In accordance with this second mode, the congestion information in the backward direction can be neglected. This becomes effective in such a case that the congestion information is not required, depending upon service conditions.

Fig. 22 indicates the contents of the mode operations.

Fig. 23 shows the set values of BECN of the Q. 922 core frame in the respective modes.

MODE SETTING OPERATION OF BACKWARD DIRECTION:

FRAME RELAY NETWORK → ATM NETWORK

Fig. 17 is a flow chart for showing a control sequence in the backward direction defined from the frame relay network to the ATM network. In this mode setting operation, the state transition of either "congestion occurs" or "no congestion" is

judged with providing a protection time period in accordance with the VCC congestion state transition diagram shown in Fig.

4. A state monitoring operation of this VCC is carried out by a VCC state monitoring unit 416 shown in Fig. 1. In Fig. 4, "no VCC congestion" is set as an initial setting condition (step 2601). Then, when EFCI=1 is received (step 2606), the timer T starts its time counting operation (step 2603). While the time counting operation is commenced by this timer T, the present state is moved to "VCC congestion occurs" (step 2604). Then, when EFCI=0 is received by time out (step 2605), or time out is taken place (step 2606), the present state is again moved to "no VCC congestion" state.

Next, in the below-mentioned mode 1, or mode 3, the state transition occurs at timing when EFCI=1 of a final ATM cell.

In the below-mentioned mode 2, or mode 4, the state transition occurs at timing when EFCI=1 of any one of ATM cells.

In the case that "VCC congestion occurs" is found based upon the state transition as explained in Fig. 4 (step 1701), the value of BECN of FR-SSCS is set to "0" (step 1702).

On the other hand, when there is no congestion of VCC and furthermore such a Q. 922 core frame is received, the BECN value of which is set to "0", the BECN value of FR-SSCS is set to "0" (step 1702).

In any cases that the BECN value of the received Q. 922 core frame is equal to any value other than "0", modes 1 to 4 can be set.

In the first mode, an EFCI value of an ATM cell in a "last" segment frame is employed in a VCC congestion transition, and furthermore, the congestion state of VCC is set to "congestion occurs". The final segment frame is received along an ATM network to frame relay network direction used in a bi-directional connection. In this case, "1" is set to the BECN

value of FR-SSCS.

A second mode corresponds to such a mode in which a BECN value of a Q. 922 core frame transmitted along a frame relay network - ATM network direction is set, or an EFCI value of an ATM cell in any one of segment frames is employed in a VCC congestion transition, and furthermore, the congestion state of VCC is set to "congestion occurs". This any segment frame is received along the ATM network to frame relay network direction used in the bi-directional connection. In this case, "1" is set to the BECN value of FR-SSCS.

In a third mode, a BECN value of a received Q. 922 core frame is negligible. Then, in this third mode, an EFCI value of an ATM cell in a "final" segment frame is employed in a VCC congestion transition, and furthermore, the congestion state of VCC is set to "congestion occurs". The final segment frame is received along the ATM network to frame relay network

direction used in the bi-directional connection. In this case, "1" is set to the BECN value of FR-SSCS.

Similarly, in a fourth mode, a BECN value of a received Q. 922 core frame is negligible. Then, this fourth mode corresponds to such a mode in which an EFCI value of an ATM cell in any one of segment frames is employed in a VCC congestion transition, and furthermore, the congestion state of VCC is set to "congestion occurs". This any segment frame is received along the ATM network to frame relay network direction used in the bi-directional connection. In this case, "1" is set to the BECN value of FR-SSCS.

As a consequence, in this case, the mode 3 and the mode 4 are additionally provided, by which there is no mutual compatibility between the congestion information in FR-SSCS and the congestion information in the Q. 922 core frame. As a result, it is possible to select such a flexible transmission

system for the congestion information.

Fig. 24 indicates the contents of these first to fourth modes, and Fig. 25 represents the setting values of the BECN of FR-SSCS in the respective modes.

FR-SSCS
Mode 1
Mode 2
Mode 3
Mode 4
Mode 5
Mode 6
Mode 7
Mode 8
Mode 9
Mode 10
Mode 11
Mode 12
Mode 13
Mode 14
Mode 15
Mode 16
Mode 17
Mode 18
Mode 19
Mode 20
Mode 21
Mode 22
Mode 23
Mode 24
Mode 25
Mode 26
Mode 27
Mode 28
Mode 29
Mode 30
Mode 31
Mode 32
Mode 33
Mode 34
Mode 35
Mode 36
Mode 37
Mode 38
Mode 39
Mode 40
Mode 41
Mode 42
Mode 43
Mode 44
Mode 45
Mode 46
Mode 47
Mode 48
Mode 49
Mode 50
Mode 51
Mode 52
Mode 53
Mode 54
Mode 55
Mode 56
Mode 57
Mode 58
Mode 59
Mode 60
Mode 61
Mode 62
Mode 63
Mode 64
Mode 65
Mode 66
Mode 67
Mode 68
Mode 69
Mode 70
Mode 71
Mode 72
Mode 73
Mode 74
Mode 75
Mode 76
Mode 77
Mode 78
Mode 79
Mode 80
Mode 81
Mode 82
Mode 83
Mode 84
Mode 85
Mode 86
Mode 87
Mode 88
Mode 89
Mode 90
Mode 91
Mode 92
Mode 93
Mode 94
Mode 95
Mode 96
Mode 97
Mode 98
Mode 99
Mode 100

WHAT IS CLAIMED IS:

1. An apparatus for interfacing a frame relay network and an ATM (Asynchronous Transfer Mode) network, comprising:

congestion information extracting means for extracting congestion information from data of one network of said frame relay network and said ATM network;

mode setting means for combining said extracted congestion information with congestion information of an output side in accordance with a setting condition; and

congestion information writing means for writing the combined congestion information into data of the other network of said frame relay network and said ATM network in accordance with a mode set by said mode setting means.

2. A congestion information setting system as claimed in Claim

1 wherein:

while setting the congestion information along a forward

direction defined from the frame relay network to the ATM network, when said mode setting means receives frame relay data indicating that the congestion information corresponds to "congestion occurs", said mode setting means selects any one of:

a first mode in which "congestion occurs" is set to at least congestion information of an ATM cell corresponding to a segment frame;

a second mode in which "congestion occurs" is set to congestion information of all of ATM cells corresponding to a segment frame; and

a third mode in which "congestion occurs" is set only to congestion information of a final ATM cell corresponding to a segment frame.

3. A congestion information setting system as claimed in Claim 1 wherein:

while setting the congestion information along a forward direction defined from the ATM network to the frame relay network, when said mode setting means receives an ATM cell indicating that the congestion information corresponds to "congestion occurs", said mode setting means selects any one of:

a first mode in which "congestion occurs" is set to at least congestion information of frame relay data when said received ATM cell is a final ATM cell corresponding to a segment frame; and

a second mode in which "congestion occurs" is set to congestion information of frame relay data when said received ATM cell is any one of ATM cells corresponding to a segment frame.

4. A congestion information setting system as claimed in Claim 1 wherein:

while setting the congestion information along a backward direction defined from the ATM network to the frame relay network,

said mode setting means selects any one of:

a first mode in which the congestion information transmitted from the backward direction is directly set to congestion information of frame relay data; and

a second mode in which congestion information of frame relay data is always set to "no congestion".

5. A congestion information setting system as claimed in Claim 1 wherein:

while setting the congestion information along a backward direction defined from the frame relay network to the ATM network,

said mode setting means is comprised of:

congestion transition means for transferring a congestion

state in response to a congestion information value of an ATM cell received along the backward direction; and

said mode setting means selects any one of plural modes prepared by combining the state of said congestion transition means with congestion information of frame relay data.

6. A congestion information setting system as claimed in

Claim 5 wherein:

said congestion transition means is comprised of a timer, and forcibly updates a congestion state when new congestion information is not reached for a predetermined time period.

ABSTRACT OF THE DISCLOSURE

In a transmission service for connecting a frame relay network to an ATM (asynchronous transfer mode) network, since a congestion information setting system used in a connection apparatus capable of interfacing the frame relay network and the ATM network, is arranged by: congestion information extracting means for extracting congestion information from data of one network of said frame relay network and said ATM network; mode setting means for combining said extracted congestion information with congestion information of an output side in accordance with a setting condition; and congestion information writing means for writing the combined congestion information into data of the other network of said frame relay network and said ATM network in response to a mode set by said mode setting means are provided, the congestion information can be transmitted between different networks in a

flexible manner. This congestion information setting system can be flexibly applied to a case where congestion information of one network is directly transmitted to the other network; another case where the congestion information of one network is directly transmitted to the other network only under predetermined condition; and another case where it is desirable that the congestion information of one network is completely untransmitted to the other network.

[illegible]

● BLOCK DIAGRAM OF ATM TO FR / FR TO ATM (FORWARD, BACKWARD)

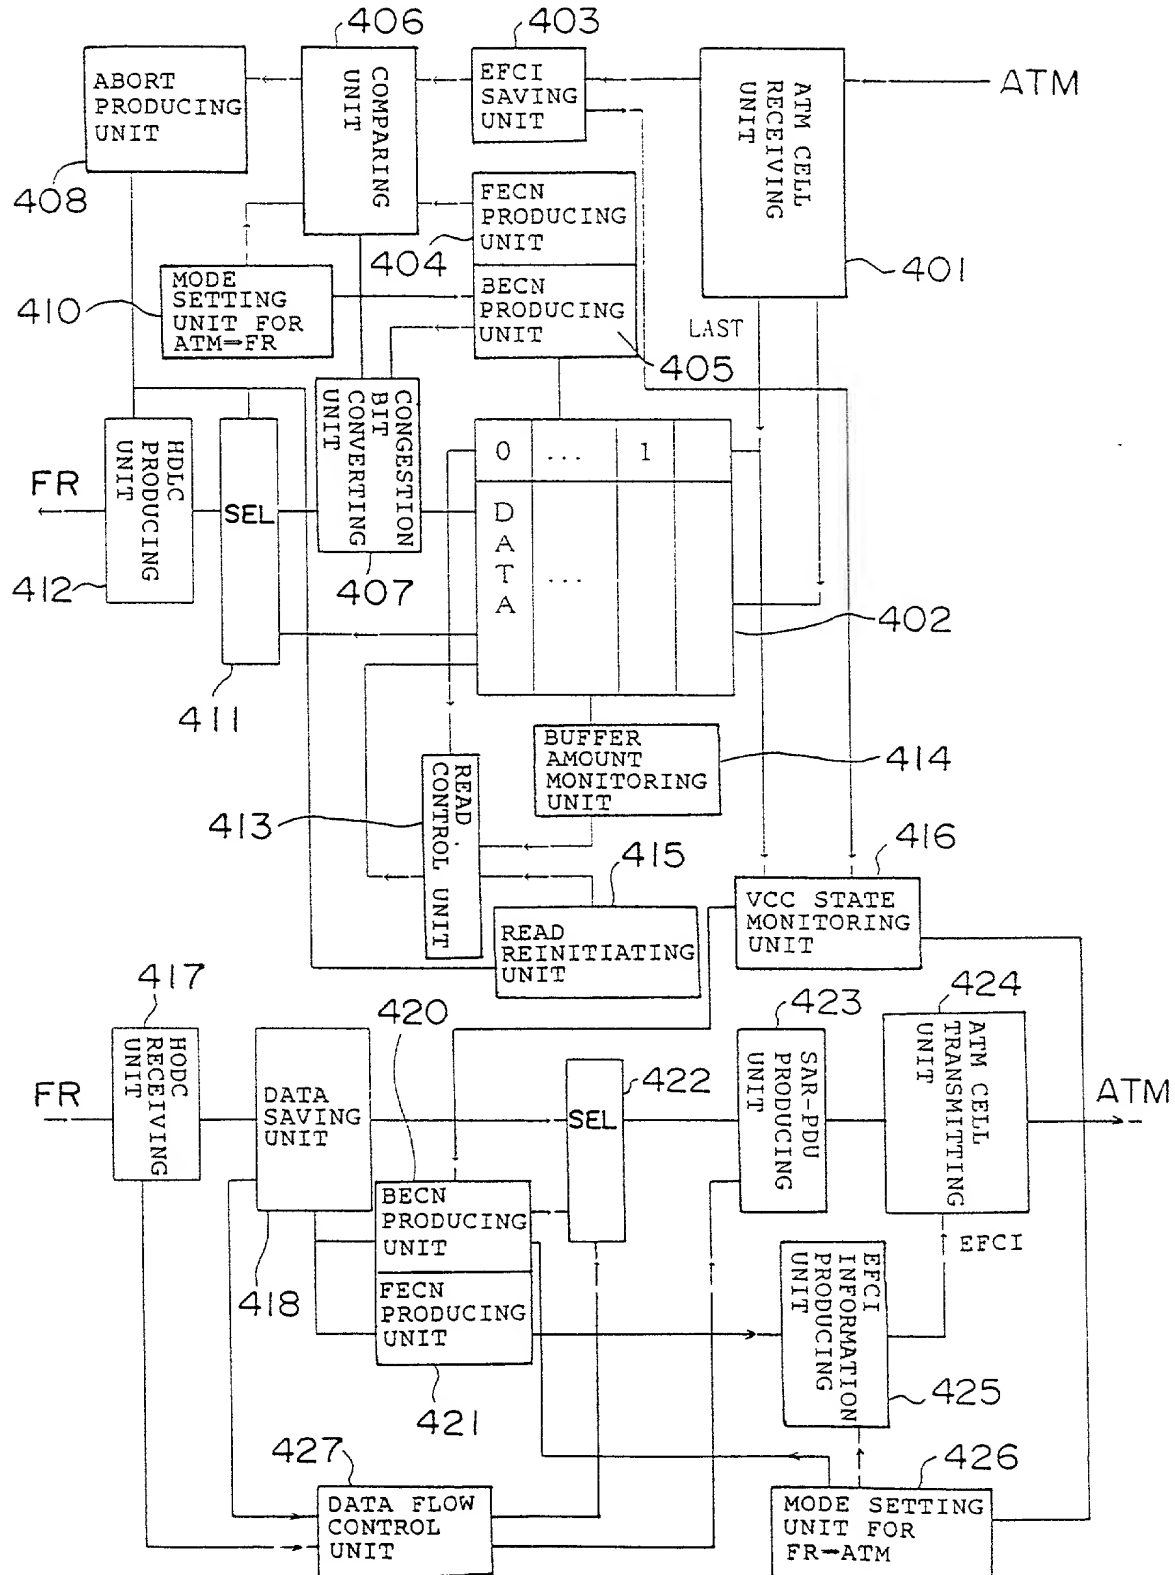


FIG. 2

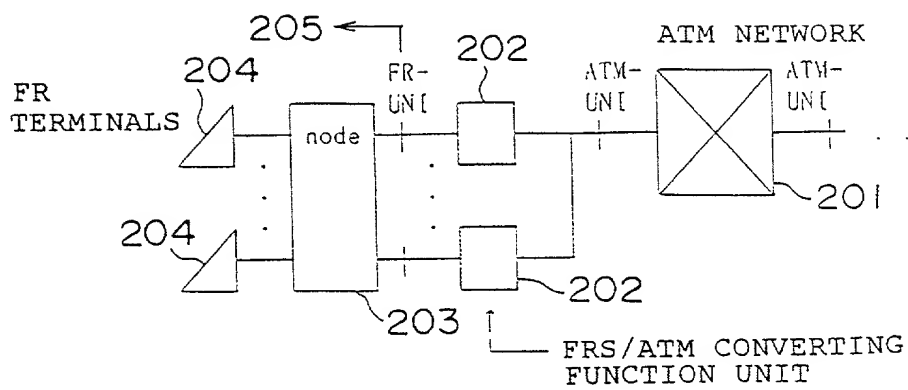


FIG. 3

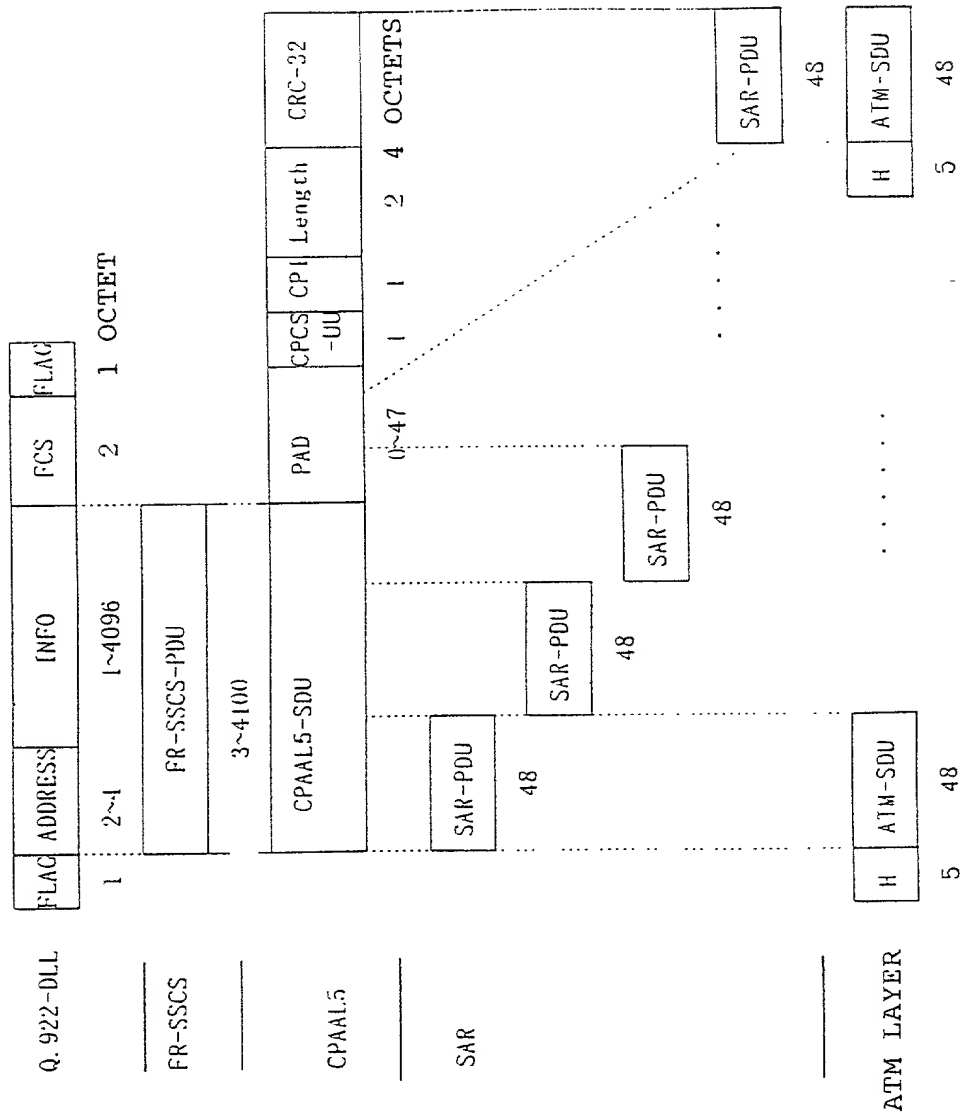


FIG. 4

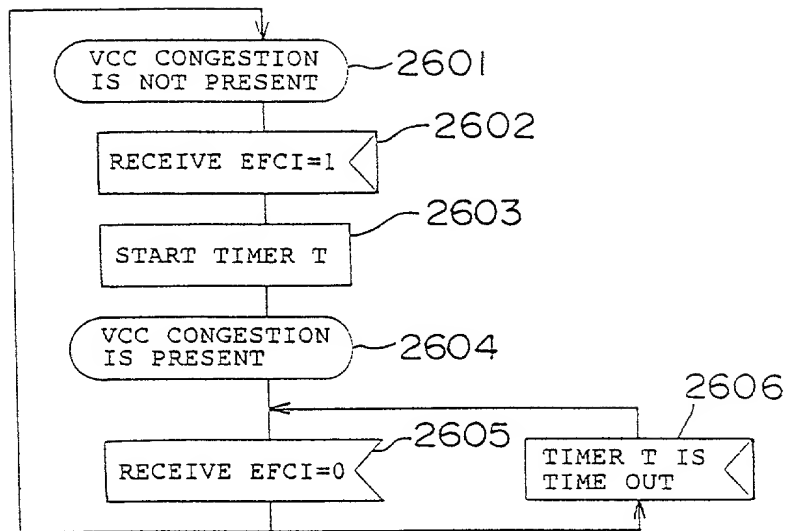


FIG. 5

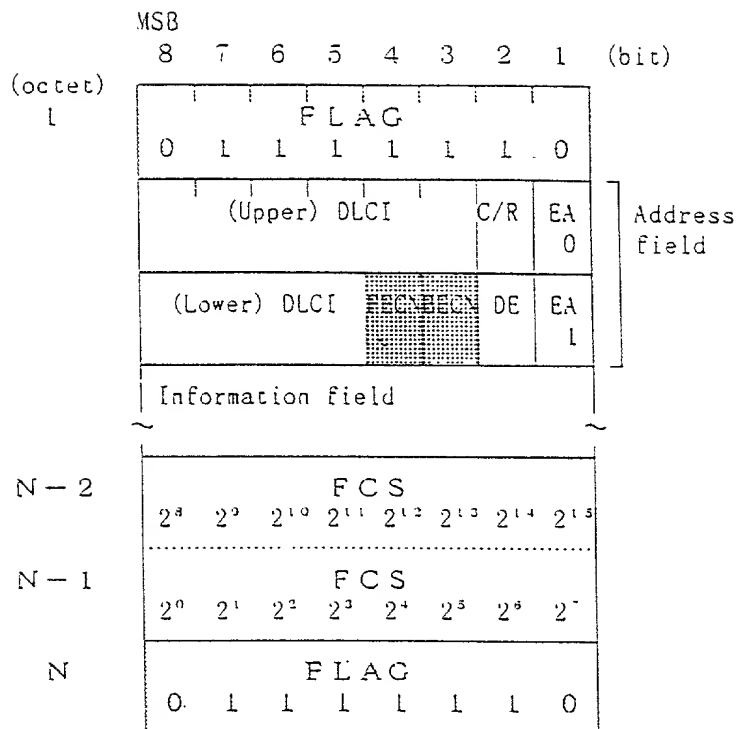


FIG. 6

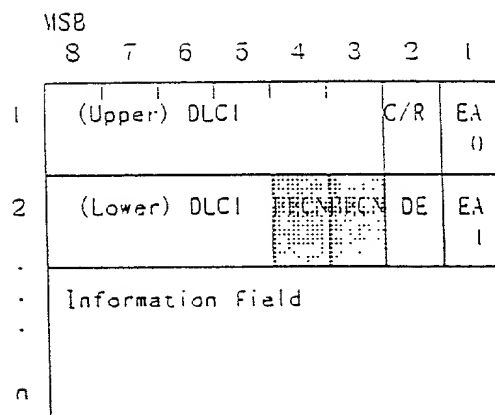


FIG. 7

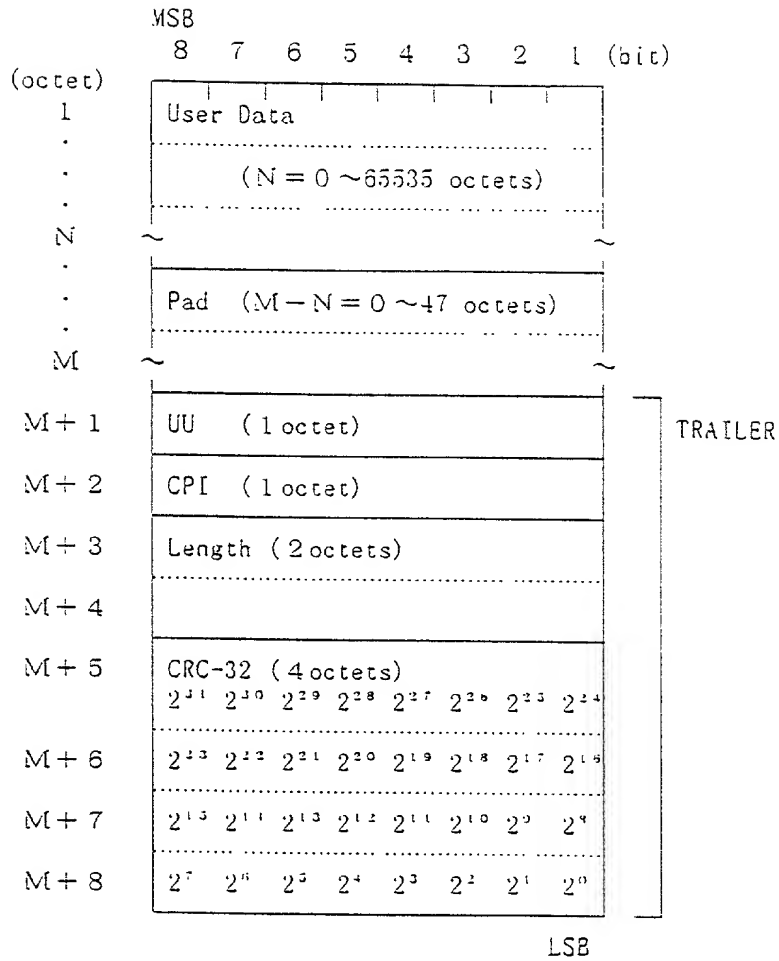


FIG. 8

FIELD	OCTET	CONTENT
USER DATA	1-655350	<p>USER DATA FIELD:</p> <p>IN THE CASE OF LENGTH FIELD VALUE ≥ 1, CPAAL5-5DU IS TRANSMITTED.</p> <p>IN THE CASE OF LENGTH FIELD VALUE = 0, FORWARD ABORT FORMATION FOR CAAL5-PDU IS APPLIED.</p>
PAD	0-47	PAD FIELD:
UU	1	USER-USER FIELD:
CPI	1	COMMON PART INDICATOR FIELD:
LENGTH	2	LENGTH FIELD:
CRC-32	1	CRC-32 FIELD:

FIG. 9

1	CFC (UNI) / VPI (NNI)	VPI	
2	VPI	VCI	
3	VCI		
4	VCI	PTI	CLP
5	HEC		
...			
53	Pay load		

FIG. 10

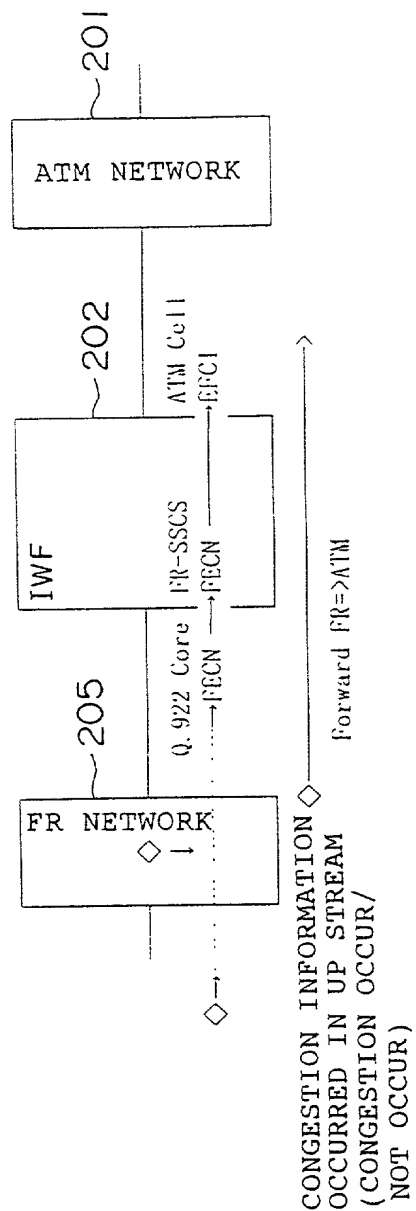


FIG. 11

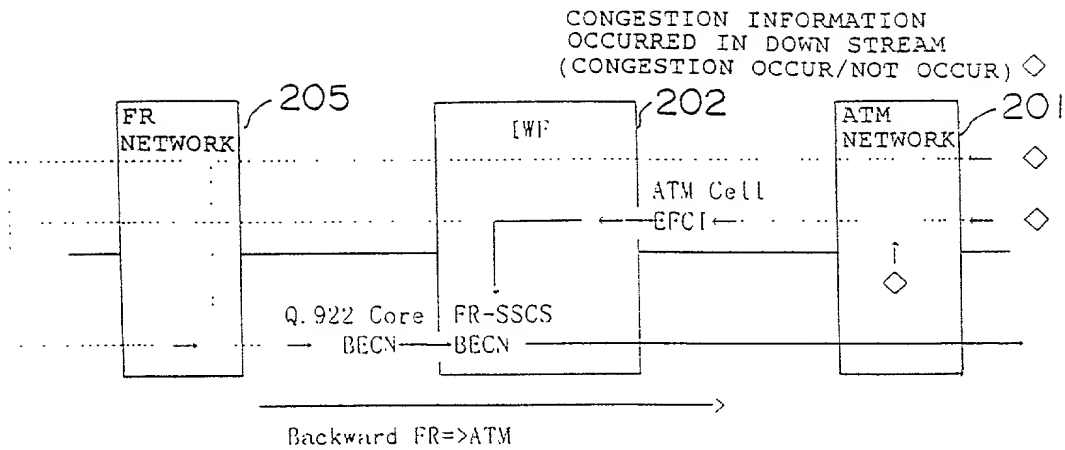


FIG. 12

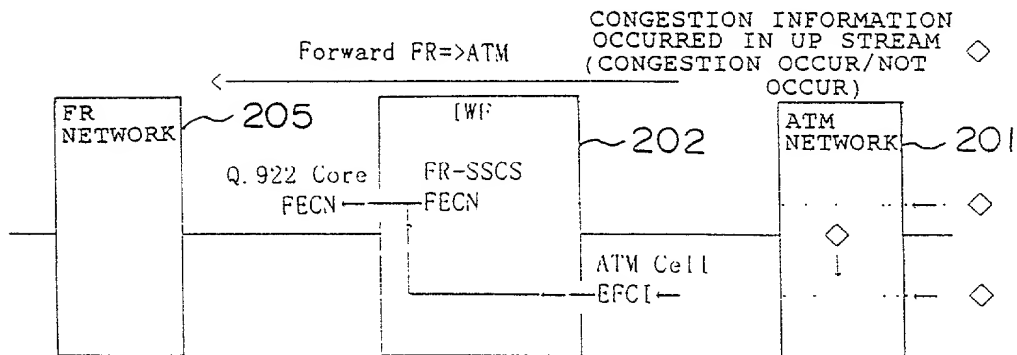


FIG. 14

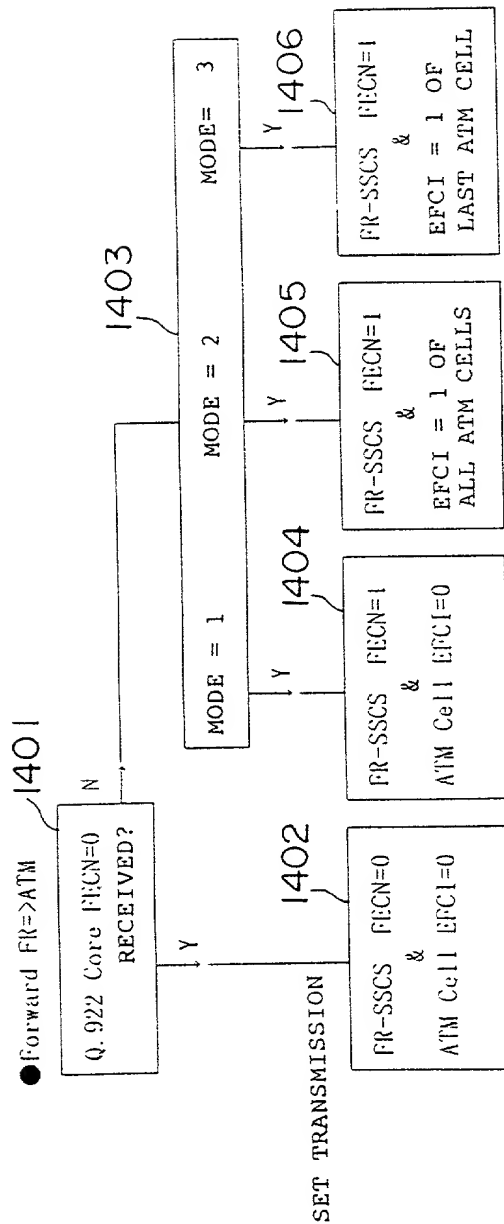


FIG. 15

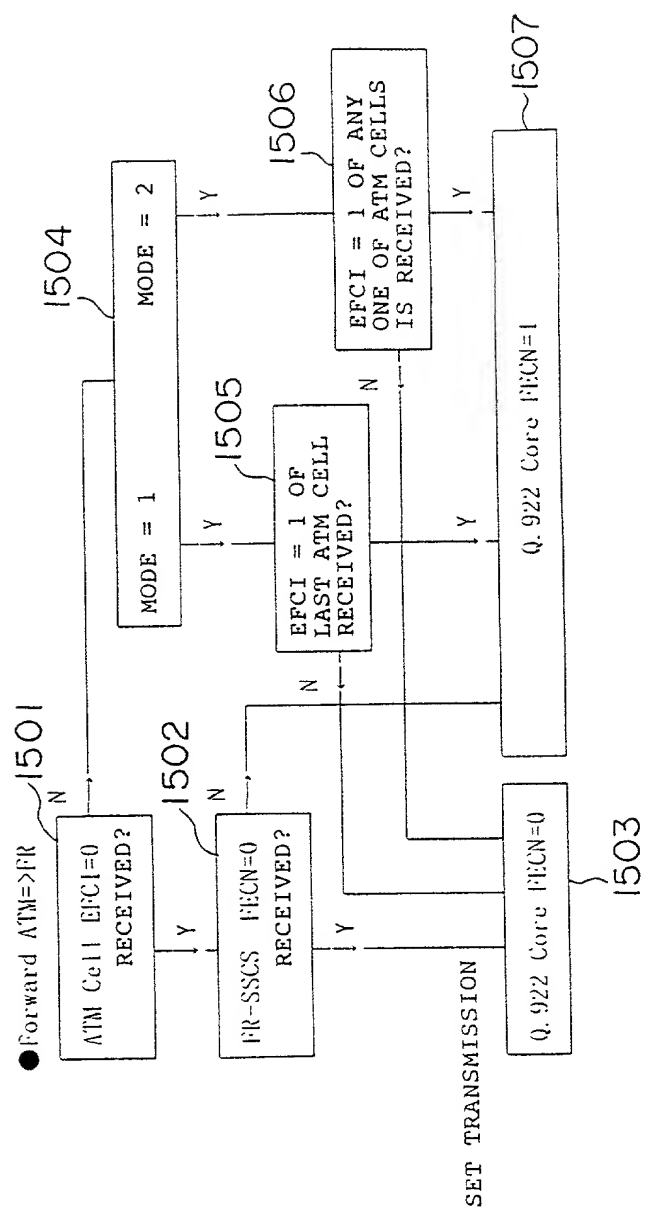


FIG. 16

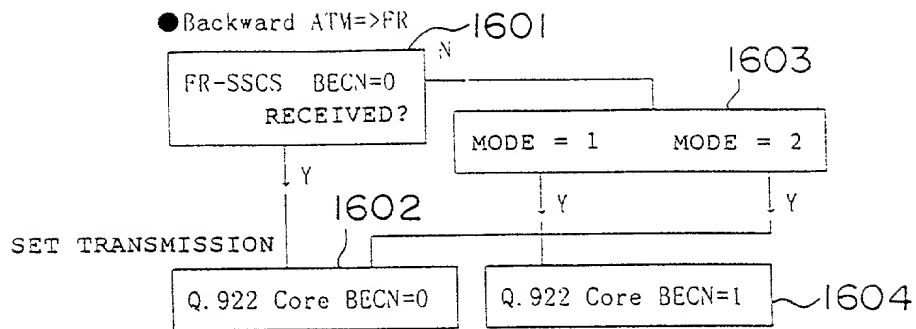


FIG. 17

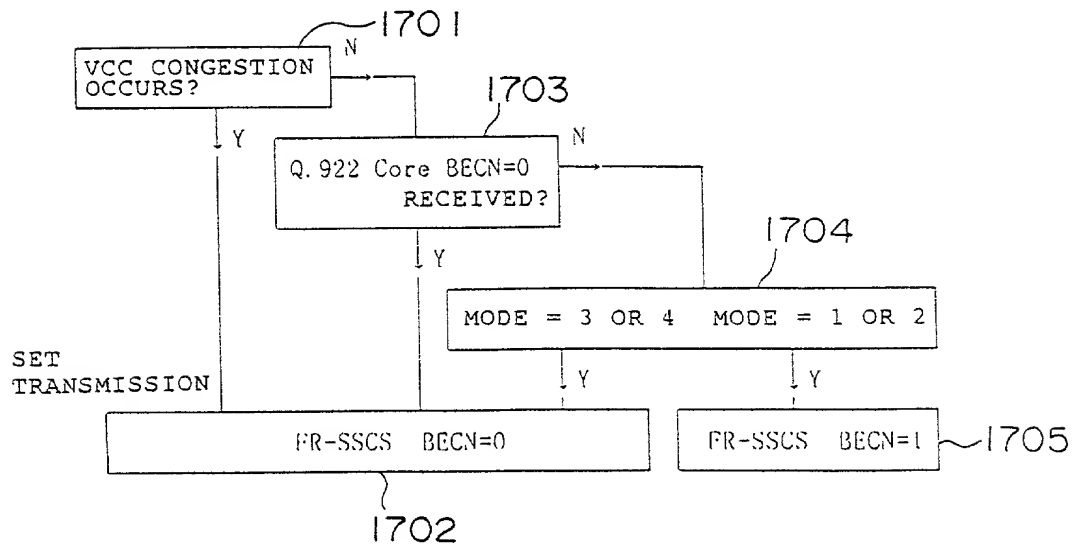


FIG. 18

	CONTENTS	REMARKS
MODE 1	<p>FECN of Q. 922-DLL frame is not mapped to EFCI of the ATM cell belonging to that frame. That is, EFCI field of ATM cell is constantly set to "no congestion occurs."</p> <p>However, if no congestion occurs in a forward direction, FECN field of FRSSCS-PDU is constantly set to "no congestion occurs."</p> <p>Or otherwise, FECN field of FRSSCS-PDU is set to "congestion occurs." That is, EFCI field of Q. 922-DLL frame is copied to FECN field of FR-SSCS-PDU without any modification.</p>	
MODE 2 (NEW)	<p>FECN of Q. 922-DLL frame is mapped to EFCI of all ATM cells belonging to that frame.</p>	
MODE 3 (NEW)	<p>FECN of Q. 922-DLL frame is not mapped to EFCI of the last ATM cell belonging to that frame.</p>	

FIG. 19

	RECEPTION	TRANSMISSION		REMARKS
	Q.922 FECN	FR-SSCS FECN	ATM EFCI	
MODE 1	0 1	0 1	0 0	
MODE 2 (NEW)	0 1	0 1	0 1 ※1	※1 : SET TO ALL ATM CELLS
MODE 3 (NEW)	0 1	0 1	0 1 ※2	※2 : SET TO FINAL ATM CELL

FIG. 19 is a table showing the relationship between the reception and transmission of the Q.922 and FR-SSCS FECN and ATM EFCI for MODE 1, MODE 2 (NEW), and MODE 3 (NEW). The table is divided into four columns: RECEPTION, TRANSMISSION, and REMARKS. The RECEPTION column contains Q.922 and FECN. The TRANSMISSION column contains FR-SSCS and FECN. The REMARKS column contains the relationship between the reception and transmission of the Q.922 and FR-SSCS FECN and ATM EFCI for MODE 1, MODE 2 (NEW), and MODE 3 (NEW). The table shows that for MODE 1, the reception and transmission of the Q.922 and FECN are 0 and 1, and the transmission of the FR-SSCS and FECN are 0 and 0. For MODE 2 (NEW), the reception and transmission of the Q.922 and FECN are 0 and 1, and the transmission of the FR-SSCS and FECN are 0 and 1. For MODE 3 (NEW), the reception and transmission of the Q.922 and FECN are 0 and 1, and the transmission of the FR-SSCS and FECN are 0 and 1. The REMARKS column shows that for MODE 2 (NEW), the relationship between the reception and transmission of the Q.922 and FR-SSCS FECN and ATM EFCI is ※1 : SET TO ALL ATM CELLS. For MODE 3 (NEW), the relationship between the reception and transmission of the Q.922 and FR-SSCS FECN and ATM EFCI is ※2 : SET TO FINAL ATM CELL.

FIG. 21

				REMARKS
	ATM EFCI	FR-SSCS FECN	Q.922 FECN	
MODE 1	0	0	0	*1: If
	0	1	1	EFCi has
	1 *1	0	1	been set
	1 *1	1	1	at last
				final ATM
				cell
MODE 2	0	0	0	*2: If
(NEW)	0	1	1	EFCi has
	1 *2	0	1	been set
	1 *2	1	1	at any of
				the ATM
				cell

FIG. 22

	CONTENT	REMARKS
MODE 1	BECN FIELD OF FIR-SSCS-PDU IS DUPLICATED TO BECN FIELD OF Q.922 CORE FRAME WITHOUT ANY CHANGE.	
MODE 2 (NEW)	BECN OF Q.922-DLL FRAME IS ALWAYS SET TO "0" .	

FIG. 23

	RECEPTION	TRANSMISSION	REMARKS
	FR-SSCS BECN	Q.922 BECN	
MODE 1	1 0	1 0	
MODE 2 (NEW)	1 0	0 0	

FIG. 24

	CONTENT	REMARKS
MODE 1	<ol style="list-style-type: none"> 1. If BECN of Q. 922-DLL frame to be delivered from FR to ATM directions has been set, or 2. if the value of EFCI in the last segment frame ATM cell to be received from ATM to FR directions used in the bi-directional connection is used for a VCC congestion state transition and the VCC congestion state is of "congestion occurs," FR-SSCS BECN = 1 is set. 	
MODE 2 (NEW)	<ol style="list-style-type: none"> 1. If BECN of Q. 922-DLL frame to be delivered from FR to ATM directions has been set, or 2. if the value of EFCI in any of the segment frame ATM cell to be received from ATM to FR directions used in the bi-directional connection is used for a VCC congestion state transition and the VCC congestion state is of "congestion occurs," FR-SSCS BECN = 1 is set. 	
MODE 3 (NEW)	<ol style="list-style-type: none"> 1. BECN of Q. 922-DLL frame to be received is ignored. Therefore, 2. Only if the condition is similar to that of MODE 1 (2), FR-SSCS BECN = 1 is set. 	
MODE 4 (NEW)	<ol style="list-style-type: none"> 1. BECN of Q. 922-DLL frame to be received is ignored. Therefore, 2. Only if the condition is similar to that of MODE 2 (2), FR-SSCS BECN = 1 is set. 	

FIG. 25

	VCC CONGESTION STATE	RECEPTION	TRANSMISSIO N	
		Q.922 BECN	FR-SSCS BECN	
MODE 1	NO CONGESTION OCCURS	0 1	0 1	※1: WHEN EFCI IS SET TO FINAL ATM CELL
	CONGESTION OCCURS	0 1	1 1	
MODE 2 (NEW)	NO CONGESTION OCCURS	0 1	0 1	※2: WHEN EFCI IS SET TO ANY ONE OF ATM CELLS
	CONGESTION OCCURS	0 1	1 1	
MODE 3 (NEW)	NO CONGESTION OCCURS	0 1	0 0	※1: WHEN EFCI IS SET TO FINAL ATM CELL
	CONGESTION OCCURS	0 1	1 1	
MODE 4 (NEW)	NO CONGESTION OCCURS	0 1	0 0	※2: WHEN EFCI IS SET TO ANY ONE OF ATM CELLS
	CONGESTION OCCURS	0 1	1 1	

PTO/SB/106 (8-96)

Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application**特許出願宣言書及び委任状****Japanese Language Declaration****日本語宣言書**

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

CONGESTION INFORMATION SETTING SYSTEM

上記発明の明細書（下記の欄でxが1がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
(該当する場合) _____ に訂正されました。☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条5.6項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Page 1 of 1

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner of Patents and Trademarks, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願
10-282567

(Number)
(番号)

Japan

(Country)
(国名)

05/10/1998

(Day/Month/Year Filed)
(出願年月日)

Priority Not Claimed
優先権主張なし

☐

(Number)
(番号)

(Country)
(国名)

(Day/Month/Year Filed)
(出願年月日)

☐

私は、第35編米国法典119条(e)項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じているところに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

書類送付先

Aaron B. KARAS, Reg. No. 18,923; Samson HELFGOTT,
Reg. No. 23,072 and Leonard COOPER Reg. No. 27,625
Send Correspondence to:
HELFGOTT & KARAS, P.C.
Empire State Building, 60th Floor
New York, New York 10118
United States of America

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

Helgott & Karas, P.C.
(212) 643-5000

唯一または第一発明者名	Full name of sole or first inventor		
	Miyuki KAWATAKA		
発明者の署名	日付	Inventor's signature	Date
		7/高 美由紀	September 14, 1999
住所	Residence		
	Kawasaki-shi, Kanagawa, Japan		
国籍	Citizenship		
	Japanese		
私書箱	Post Office Address		
	c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa, 211-8588 Japan		
第二共同発明者	Full name of second joint inventor, if any		
第二共同発明者	日付	Second inventor's signature	Date
住所	Residence		
国籍	Citizenship		
私書箱	Post Office Address		

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)

THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of: Miyuki KAWATAKA

Filed: : Concurrently herewith

For : CONGESTION INFORMATION SETTING SYSTEM

Serial No.: Concurrently herewith

September 23, 1999


Assistant Commissioner of Patents
Washington, D.C. 20231

SUB-POWER OF ATTORNEY

S I R:

I, Samson Helfgott Reg. No. 23,072 attorney of record
herein, do hereby grant a sub-power of attorney to Linda S.
Chan, Reg. No. 42,400 and Jacqueline M. Steady, Reg. No. 44,354
to act and sign in my behalf in the above-referenced application.

Respectfully submitted,

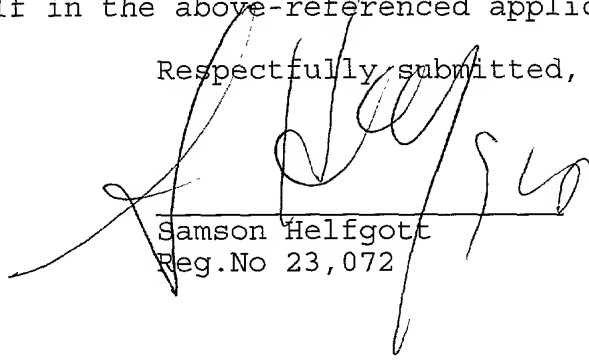

Samson Helfgott
Reg. No 23,072

HELFGOTT & KARAS, P.C.
60th FLOOR
EMPIRE STATE BUILDING
NEW YORK, NY 10118
DOCKET NO.: FUJY16.538
LHH:power

Filed Via Express Mail

Rec. No.: EM366877247US

On: September 23, 1999

By 

Any fee due as a result of this paper, not covered
by an enclosed check may be charged on Deposit
Acct. No. 08-1634.